

IP Decoder

HIKVISION

1-Ch quad IP Video Decoder

- IP Single Channel decoder video server
- 4 Channels Video BNC, VGA, HDMI and DVI
- Decoding capacity: 1-CH HD1080 or 2-CH HD720P or 4-CH 4CIF
- Video and Audio Realtime Transmission
- H.264/AVC Baseline decoding mode multi protocol (25 fps max)
- Automatic IP connection
- Web Viewer by Software included

SUMMARY

Aasset Security presents the HIKVISION decoders DS6101HFIIIPA, DS6101HFIIIPSD, DS6504HFI, DS6508HFI and DS6516HFI.

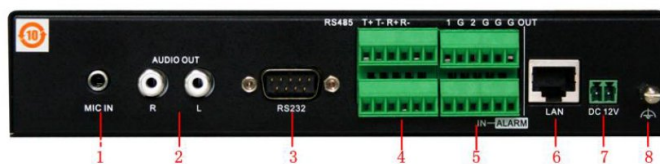
IP Decoder

HIKVISION**SPECIFICATIONS**

Operating System	Embedded Linux
Video Outputs	4-CH Video BNC, VGA, HDMI and DVI
Audio Inputs	1x 3.5mm jack
Audio Outputs	2 CH, RCA
Network	10/100 Base-T
Browser	Software included or Internet Explorer (5.0 or Higher)
Video Compression	H264/AVC Baseline
Display Resolution	1-CH HD1080 (1920x1080) or 2-CH HD720P (1280x720) or 4-CH 4CIF (720x576)
Network Protocol	DHCP, TCP, UDP, HTTP
UPnP	Supporting Auto Network Configuration
Network Streaming	TCP, UDP (Unicast, Multicast)
Audio Compression	OggVorbis 16Kbps
Serial Interface(s)	1x RS-232, 1x RS-485
IP Installer	IP Address Installation Function (Win XP & 2000 support)
Software Upgrade	Firmware Upgrade by Web Browser
Access Level	Guest, Administrator, Operator, User
Time Setting	Setting by master Server
Operating Temperature	-10°C ~ +55°C
Humidity	10 ~ 90% no condensation
Supply Voltage	12 VDC power adaptor included
Power Consumption	12 W
Weight	1,5 kg
Dimensions w*h*d	198 x 39 x 123 mm



IP Decoder

HIKVISION**Connections**

Front Panel: (1)-Power LED (2)-Network connection LED (3)-Data RX/TX status LED (4)-RESET default settings (5)-VGA video output (6)-DVI video output (7)-HDMI video output (8)-BNC video output

Rear Panel: (1)-Audio input (2)-Audio outputs (3)-RS232 interface (4)-RS485 interface (5)-Alarm inputs and outputs (6)-Ethernet interface (7)-Power connector (8)-Ground

